

# SD SERIES

## Large plastic filters




## FEATURES

- Disc cartridge: 120 and 150 mesh
- Body, lid and locking ring in fiberglass reinforced nylon, Filtering surface area:
  - 2" and 3" model with short body: 1.200 cm<sup>2</sup>
  - 3" Model: 2.000 cm<sup>2</sup>
- Ring-nut closure for easy assembly/disassembly without tools
- Pressure gauge connections to be perforated if necessary, to allow measuring the pressure and thus the cleanliness of the filter

## SPECIFICATIONS

- 1" male threaded connection to be drilled for using air release valves
- Maximum operating pressure: 10 bar
- 2 Gauge mounting points: 1/4" female Gas
- Nominal flow rates:
  - 2" Model: 25 m<sup>3</sup>/h
  - 3" Model (short and long lid): 50 m<sup>3</sup>/h
- Dimensions:
  - 2" Model: L 274 mm; H 540 mm
  - 3" Model: L 320 mm; H 785 mm

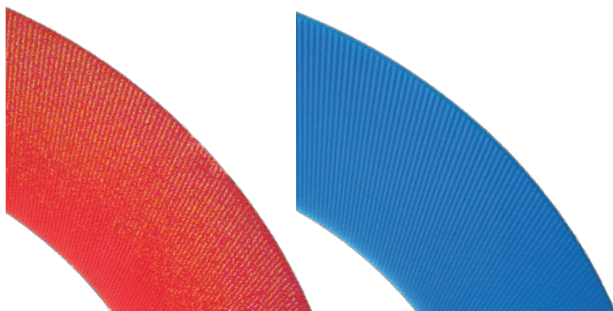

Discs Colour	Mesh
Blue	120
Red	150

## Codification

Code	Description
EU-ABF5012-3S	2" SD disc Filter, 120 mesh, standard disc
EU-ABF5015-3S	2" SD disc Filter, 150 mesh, standard disc
EU-ABF7512-3SS	3" SD disc Filter, short lid, 120 mesh, standard disc
EU-ABF7515-3SS	3" SD disc Filter, short lid, 150 mesh, standard disc
EU-ABF7512-3S	3" SD disc Filter, 120 mesh, standard disc
EU-ABF7515-3S	3" SD disc Filter, 150 mesh, standard disc