

SD SERIES

Large plastic filters




FEATURES

- Disc cartridge: 120 and 150 mesh
- Body, lid and locking ring in fiberglass reinforced nylon, Filtering surface area:
 - 2" and 3" model with short body: 1,200 cm²
 - 3" Model: 2,000 cm²
- Ring-nut closure for easy assembly/disassembly without tools
- Pressure gauge connections to be perforated if necessary, to allow measuring the pressure and thus the cleanliness of the filter

SPECIFICATIONS

- 1" male threaded connection to be drilled for using air release valves
- Maximum operating pressure: 10 bar
- 2 Gauge mounting points: 1/4" female Gas
- Nominal flow rates:
 - 2" Model: 25 m³/h
 - 3" Model (short and long lid): 50 m³/h
- Dimensions:
 - 2" Model: L274 mm; H540 mm
 - 3" Model: L320 mm; H785 mm

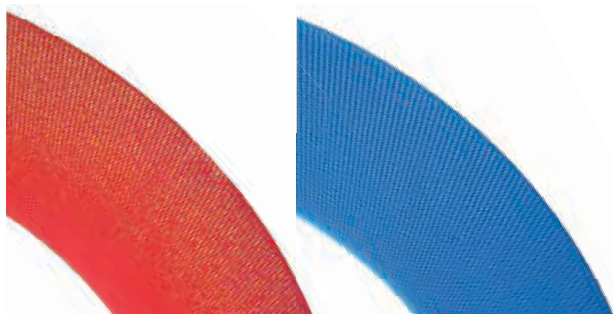

Codification

Code	Description
EU-ABF5012-3S	2" SD disc Filter, 120 mesh, standard disc
EU-ABF5015-3S	2" SD disc Filter, 150 mesh, standard disc
EU-ABF7512-3SS	3" SD disc Filter, short lid, 120 mesh, standard disc
EU-ABF7515-3SS	3" SD disc Filter, short lid, 150 mesh, standard disc
EU-ABF7512-3S	3" SD disc Filter, 120 mesh, standard disc
EU-ABF7515-3S	3" SD disc Filter, 150 mesh, standard disc